

SANY[®]

HBT9028CH-5S TRAILER PUMP

HBT9028CH-5S 拖泵

Advanced Hydraulic System

Differential pressure controlled, bi-directional hydraulic system.
High flow, high efficiency valve system
Automatically retracted pistons

Advanced Energy-saving Technology

New generation energy saving technology automatically adjusts engine power output to match the load results in fuel savings of up to 25%.

Wear-resisting Technology

G5 improved wearing part Adopt Sino-Germany high-tech materials and advanced technology to greatly improve the product performance

Intelligent Control System

Fault self-diagnosis technology
Dedicated motion controller
Emergency Override Available

Efficient Pumping System


High-efficiency pump technology
High power mixing motor
Large bore reversing cylinder
New-type hopper



TECHNICAL PARAMETER

技术参数

型号 Model		HBT9028CH-5S	
生产地 Place of Production		中国 China	
混凝土最大理论输送压力 (低压 / 高压) Max. Delivery Pressure (theoretical) Low Pressure / High Pressure (Mpa)		19/28	
混凝土最大理论输送量 (低压 / 高压) Max. Concrete Output (theoretical) Low Pressure / High Pressure (m ³ /h)		95/70	
发动机 / 电动机额定功率 Motor Rated Power (kW/rpm)		2×180/2200	
输送缸直径 × 最大行程 Delivery Cylinder Bore (mm) × Stroke (mm)		Φ200×2100	
料斗容积 × 上料高度 Hopper Capacity (m ³) × Feeding Height (mm)		0.7×1420	
外形尺寸 (长 × 宽 × 高) Dimension (L*W*H) (mm)		7508×2272×2750	
总质量 Gross Weight (kg)		11910	
最大骨料尺寸 Max. Aggregate Size (mm)	输送管径 Delivery Pipe	Φ150 mm	50
		Φ120 mm	40
类型 Type		S 阀 S-Valve	
砼塌落度 Slump of Concrete (mm)		100~230	

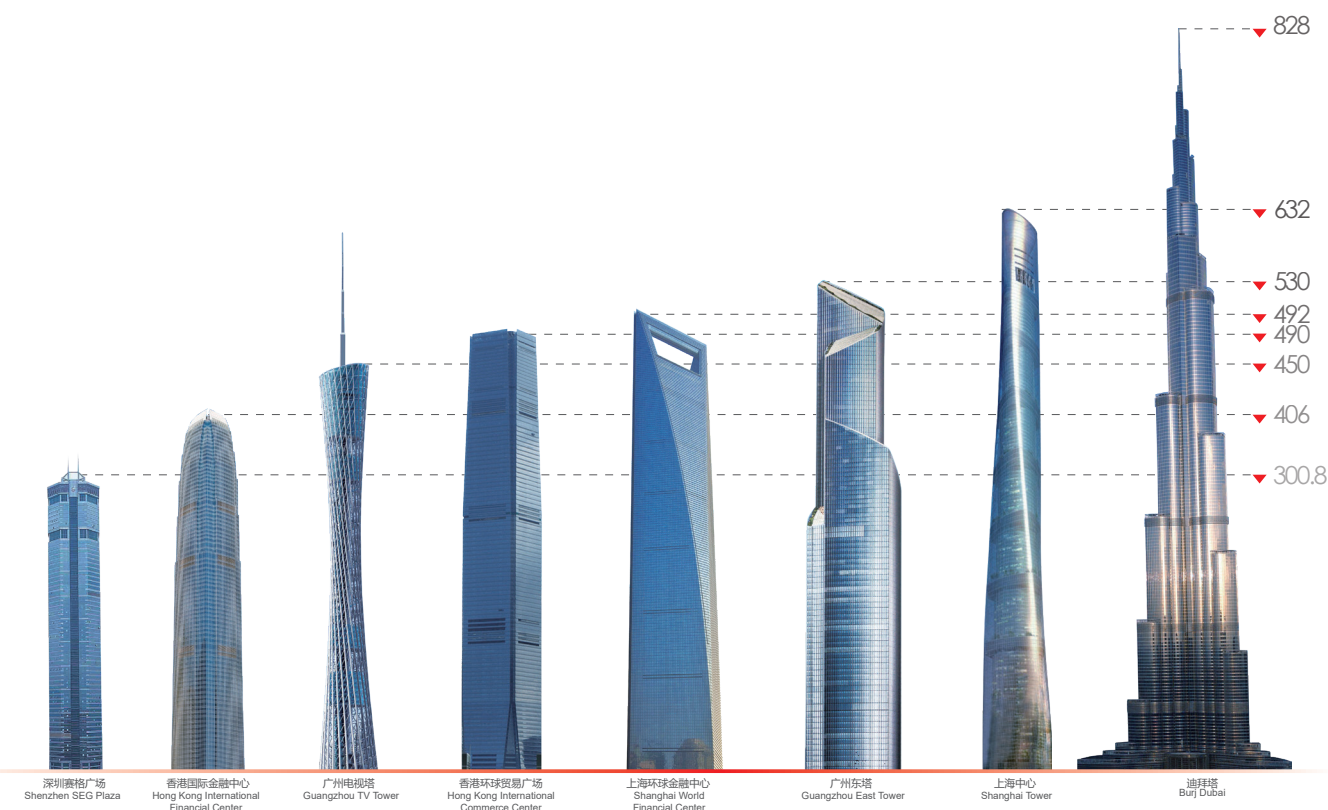

SANY HEAVY INDUSTRY CO., LTD.

SANY Industry Town, Changsha Economic and Technological Development Zone,

Hunan Province, China

Service Line: +86 4006 098 318 E-mail: crd@sany.com.cn

SANY[®]
QUALITY CHANGES THE WORLD.