

ARTICULATING BOOM LIFT

SPA14AC/SPA16AC

Compliant with CE standards



Safe

Efficient

Intelligent


- Intelligent digital equipment management system and visual human-machine interaction system for improved efficiency and intelligence
- Industry-leading fast charging technology for quickly recharging
- Stable sunken layout for smoother operations
- Fully proportional valve group and controls for more precise movements
- Efficient poprietary boom descent technology with zero energy consumption
- IP67 rated electrical parts, for exceptional durability
- 90+% common parts with the Sany boom product family, for easier maintenance and parts availability
- 360° continuous rotation for ease of operation

ARTICULATING BOOM LIFT

SPA14AC/SPA16AC

Compliant with CE standards

Model	
Platform height max.	14.0
Working height max.	16.0
Horizontal outreach max.	7.25
A-Length (stowed)	6.15
B-Width (stowed)	1.75
C-Height (stowed)	2.02
Platform dimension(L x W)	1.83
D-Ground clearance	0.17
E-Wheelbase	2.00
Lift capacity (Unrestricted)	2480
Turntable tail swing	0.26
Jib rotation	
Turntable rotation	
Platform rotation	
Platform occupancy max.	
Tilt sensor activation	
Turning radius max. (inside/outside)	1.48
Gradeability	
Drive speed-stowed	0-5
Drive speed-raised	0-10

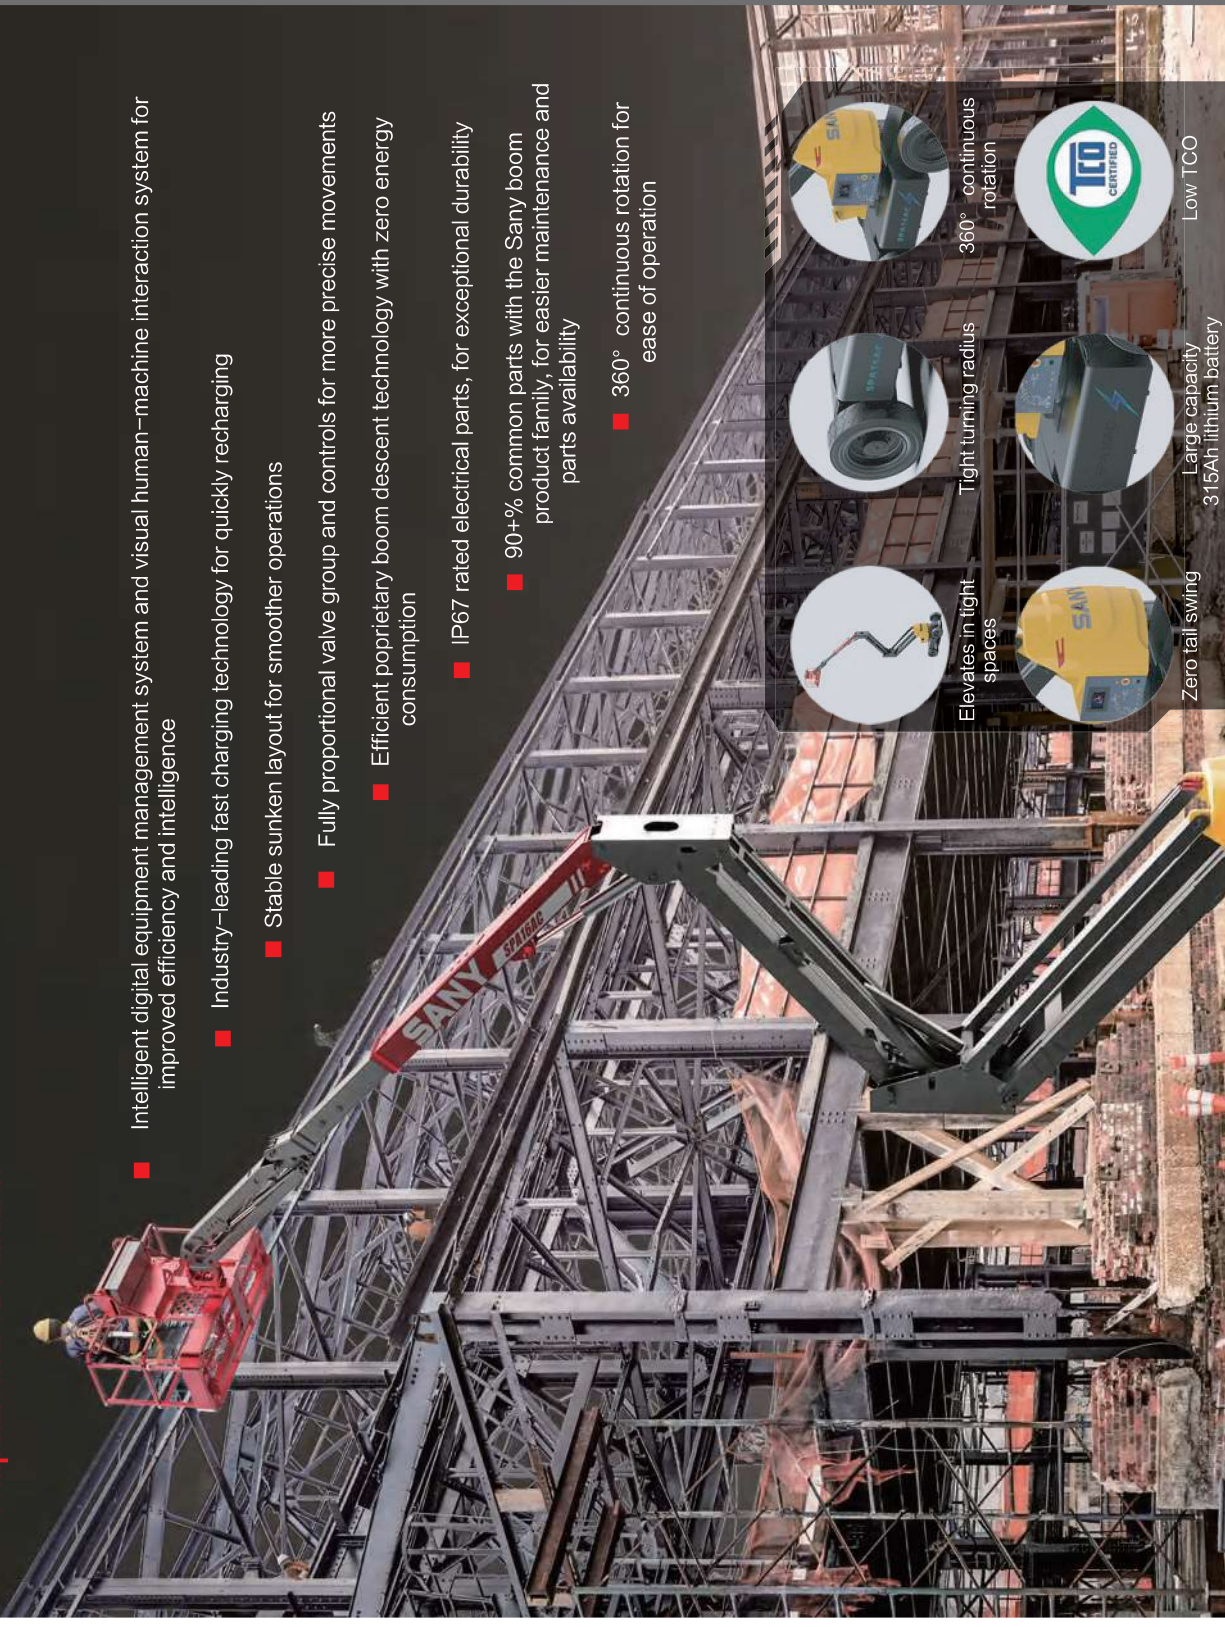

Elevates in tight spaces



Tight turning radius



360° continuous rotation



Large capacity 315Ah lithium battery



Low TCO



Zero tail swing

ARTICULATING BOOM LIFT

SPA20AC

Compliant with CE standards



Safe

Efficient

Intelligent



- Intelligent digital equipment management system and visual human-machine interaction system for improved efficiency and intelligence
- Industry-leading fast charging technology for quickly recharging
- Stable sunken layout for smoother operations
- Fully proportional valve group and controls for more precise movements
- Efficient proprietary boom descent technology with zero energy consumption
- IP67 rated electrical parts, for exceptional durability
- 90+% common parts with the Sany boom product family, for easier maintenance and parts availability
- 360° continuous rotation for ease-of-operation



ARTICULATING BOOM LIFT

SPA20AC

Compliant with CE standards

Model

Platform height max.

Working height max.

Horizontal outreach max.

A-Length (stowed)

B-Width (stowed)

C-Height (stowed)

Platform dimension(L x W)

D-Ground clearance

E-Wheelbase

Lift capacity
(Unrestricted/Restricted/Restricted)

Turntable tail swing

Jib rotation

Turntable rotation

Platform rotation

Platform occupancy max.
(Unrestricted/Restricted)

Tilt sensor activation

Turning radius max.(inside/outside)

Gradeability

Drive speed-stowed

Drive speed-raised