

# SCISSOR LIFT DC SERIES

## SPS0407DC/SPS0608DC

Compliant with CE standards

# SCISSOR LIFT DC SERIES

## SPS0407DC/SPS0608DC

Compliant with CE standards



### Intelligent

- Industry leading intelligent load system
- Interactive display for real-time monitoring and work status
- Automatically displays fault codes for fast, convenient equipment management

### Modular Design

- Modular design adopted for the entire product line
- Part commonality exceeds 90%

### Refined

- State of the art manufacturing process with exceptional quality control
- Optimized hose and harness layout for convenient maintenance

### Reliable

- E-coat and powder coating provide a durable and rust-free finish.
- IP67 rated electrical components
- Wide scissor arm stack for increased operator comfort and confidence

### Efficient & Worry-free

- Optimized hydraulic system for reduced energy consumption
- Electric drive.
- Efficient, quiet, and environmentally friendly
- Proportional control of lift and descent functions for precise and flexible operation
- Lightweight and compact.
- Elevator friendly design can access narrow spaces with exceptional maneuverability



Safe



Efficient



Intelligent

### Standard Configuration

- GPS
- Proportional controls
- Multi-purpose alarm
- Flashing amber beacon
- Self-closing swing gate
- Automatic pothole protection
- Emergency descent system

### Model

Working height max.

A-Platform height max.

B/C-Length machine  
-with/without ladder

D-Width

E-Machine height

Machine height - rails folded

F-Platform length - outside

G-Wheelbase

H/I-Ground clearance  
- pothole guards retracted/deployed

Platform dimension (L x W x H)

Max. platform occupancy (in/out)

Lift capacity

Lift capacity - extension deck extended

Drive speed - stowed/raised

Turning radius - inside/outside

Lifting motor

Gradeability - stowed

Tilt sensor activation  
(side to side /front to back)

Tires - solid non-marking



# SCISSOR LIFT HD SERIES

## SPS0608HD

Compliant with CE standards



Safe

Efficient

Intelligent

### Intelligent

- Interactive display for real-time monitoring and work status
- Automatically displays fault codes for fast, convenient equipment management

### Modular Design

- Modular design adopted for the entire product line
- Part commonality exceeds 90%

### Refined

- State of the art manufacturing process with exceptional quality control
- Optimized hose and harness layout for convenient maintenance

### Reliable

- E-coat and powder coating provide a durable and rust-free finish
- IP67 rated electrical components
- Fully sealed DC motor increases efficiency while reducing maintenance costs


### Efficient & Worry-free

- 250kg platform capacity allows more work to be done
- Fully sealed DC motor increases efficiency while reducing maintenance costs
- Standard forklift pocket for secure loading and unloading
- Swing out doors on both sides for easier maintenance



### Standard Configuration

- GPS
- Proportional controls
- Multi-purpose alarm
- Flashing amber beacon
- Self-closing swing gate
- Automatic pothole protection
- Emergency descent system

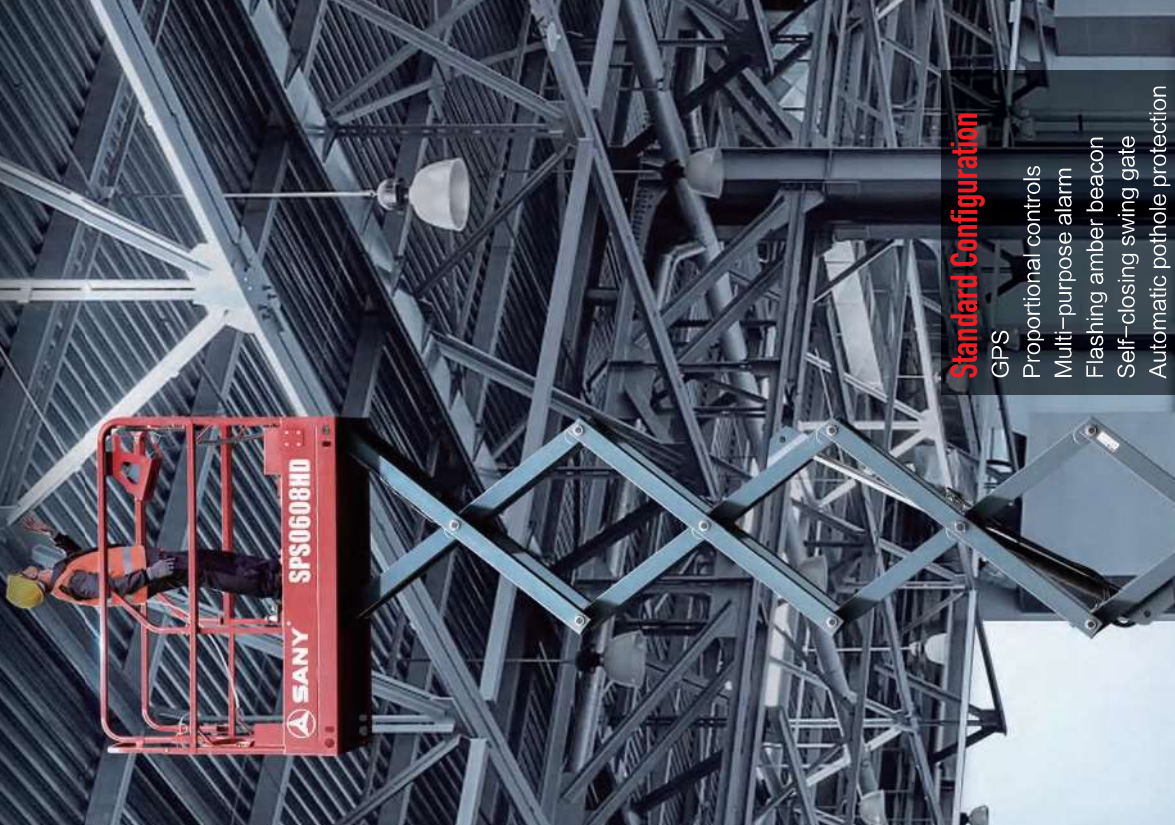

# SCISSOR LIFT SPS0608HD

Compliant with CE standards

### Model

Working height max.

A-Platform height max.

B/C-Length machine - with/without

D-Width

E-Machine height

Machine height - rails folded

F - Platform length - outside

G - Wheelbase

H/I - Ground clearance

- pothole guards retracted/deployed

Platform dimension (L x W x H)

Max. platform occupancy (in/out)

Lift capacity

Lift capacity - extension deck extended

Drive speed - stowed/raised

Turning radius - inside/outside

Lifting motor

Gradeability - stowed

Tilt sensor activation (side to side /front to back)

Tires - solid non-marking

Battery

# SCISSOR LIFT HA SERIES

**SPS0808HA/SPS1012HA/SPS1212HA/SPS1414HA**

Compliant with CE standards

## Intelligent

- Interactive display for real-time monitoring and work status
- Automatically displays fault codes for fast, convenient equipment management

## Modular Design

- Modular design adopted for the entire product line
- Part commonality exceeds 90%

## Refined

- State of the art manufacturing process with exceptional quality control
- Optimized hose and harness layout for convenient maintenance

## Reliable

- E-coat and powder coating provide a durable and rust-free finish
- IP67-rated electrical components
- Wide scissor arm stack for increased operator comfort and confidence

## Efficient & Worry-free

- Fully sealed AC motor increases efficiency while reducing maintenance costs
- Standard forklift pocket for secure loading and unloading
- Swing out doors on both sides for easier maintenance



## Safe

- Proportional controls
- Multi-purpose alarm

## Efficient

- Flashing amber beacon
- Self-closing swing gate

## Intelligent

- Automatic pothole protection
- Emergency descent system

## Standard Configuration

- GPS
- Proportional controls
- Multi-purpose alarm
- Flashing amber beacon
- Self-closing swing gate
- Automatic pothole protection
- Emergency descent system

# SCISSOR LIFT HA SERIES

**SPS0808HA/SPS1012HA/SPS1212HA/SPS1414HA**

Compliant with CE standards

Model	SPS0808	Metric
Working height max.	10.00m	
A-Platform height max.	8.00m	
B/C-Length machine - with/without ladder	2.49m / 2.27m	
D-Width	0.83m	
E-Machine height	2.38m	
Machine height - rails folded	1.89m	
F-Platform length-outside	0.90m	
G-Wheelbase	1.87m	
H-I-Ground clearance-pathole guards retracted/deployed	100mm / 20mm	
Platform dimension (L x W x H)	2.27m x 0.81m x 1.25m	

Max. platform occupancy (in/out)	250kg
Lift capacity	120kg
Lift capacity-extension deck extended	3,5/0.8 (km/h)
Drive speed -stowed/raised	0.6m / 2.5m
Turning radius -inside/outside	
Lifting motor	
Gradeability-stowed	
Tilt sensor activation (side to side / front to back)	1.
Tires -solid non-marking	Ø81mm x 127mm